


Coupling sw

F36

Class
150

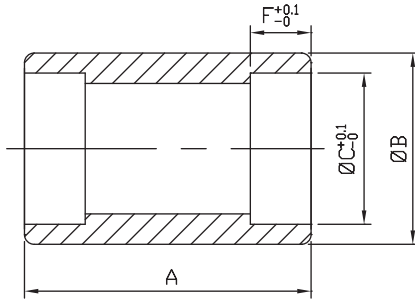

Standard Pattern

SIZE	1/8"		1/4"		3/8"		1/2"		3/4"		1"		1-1/4"		1-1/2"		2"		2-1/2"		3"		4"	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
A	19	0.75	23.5	0.93	24	0.94	32	1.26	34	1.34	41.5	1.63	45.5	1.79	46	1.81	54.5	2.15	64.5	2.54	69	2.72	78	3.07
B	13.5	0.53	18	0.71	21.5	0.85	26	1.02	31.5	1.24	39	1.54	47.5	1.87	54	2.13	66.5	2.62	83	3.27	94.5	3.72	121	4.76
C	10.8	0.43	14	0.55	17.5	0.69	22	0.87	27.3	1.07	34	1.34	43.3	1.7	49	1.93	61	2.4	73.5	2.89	89.8	3.54	115.5	4.55
F	7	0.28	7	0.28	8	0.31	10	0.39	12	0.47	14	0.55	16	0.63	16	0.63	18	0.71	23	0.91	25	0.98	28	1.1

Tolerance: $\pm 0.5\text{mm}$ (1/8"~2")
 $\pm 0.8\text{mm}$ (2-1/2"~4")

EO 9001
BUREAU VERITAS
Certification



MARKE PERIKEN
BUREAU VERITAS
Certification



TRD
100



Type
Approval
P-13548

CE CRN
0035 REGISTERED



TA-Luft ISO 15848 REACH
VDI 2440 LOW EMISSION (EC 1907/2006)



8F., No.201, Sec. 2, Tiding Blvd., Neihu District, Taipei City 114, Taiwan R.O.C.
TEL : +886-2-2658-5800 FAX : +886-2-2658-2266 / 2799-7766

[Http://www.haitima.com.tw](http://www.haitima.com.tw)
E-mail : haitima@seed.net.tw