

Mini pressure switch Flameproof enclosure Ex d Model PXA

WIKA data sheet PV 34.38



Process Mini Series

Applications

- Pressure monitoring and control of processes
- Safety-critical applications in general process instrumentation, especially in the chemical and petrochemical industries, oil and gas industries, power generation incl. nuclear power plants, water/wastewater industries, mining
- For gaseous and liquid, aggressive and highly viscous or contaminated media, also in aggressive ambience
- For measuring points with limited space, e.g. control panels

Special features

- No power supply needed for switching of electrical loads
- Robust switch enclosure from stainless steel 316L, IP66, NEMA 4X
- Setting ranges from 1 ... 2.5 bar to 200 ... 1,000 bar
- Repeatability of the set point $\leq 1\%$ of span
- 1 set point, SPDT, high switching power up to AC 250 V, 5 A



Mini pressure switch model PXA

Description

These high-quality pressure switches have been developed especially for safety-critical applications. The high quality of the products and manufacturing in accordance with ISO 9001 ensure reliable monitoring of your plant. In production, the switches are traced by quality assurance software at every step and subsequently are 100 % tested.

In order to ensure as flexible operation as possible, the pressure switches are fitted with micro switches, which enable the switching of an electrical load of up to AC 250 V, 20 A directly.

For lower switching power ratings, such as for PLC applications, argon gas-filled micro switches with gold-plated contacts can be selected as an option.

All wetted materials are from stainless steel as a standard. For applications with special requirements on the wetted parts, versions with materials from Hastelloy are available. Moreover the snap-acting behaviour of the Belleville spring increases stability and vibration resistance.

Standard version

Switch enclosure

Stainless steel 316

Tamper-proof

Laser-engraved product label from stainless steel

Ingress protection

IP66 per EN/IEC 60529, NEMA 4X

Permissible temperature

Ambient T_{amb} : -40 ... +85 °C

Medium T_M : See table on next page.

Depending on measuring element.

Switch contact

Hermetically sealed micro switches with fixed dead band.

- 1 x SPDT (single pole double throw)

Contact version		Electrical rating (resistive load)	
		AC	DC
E	1 x SPDT, silver, hermetically sealed	250 V, 5 A	24 V, 5 A
J	1 x SPDT, gold-plated, hermetically sealed	250 V, 0.5 A	24 V, 1 A

Set point adjustment

The set point can be specified by the customer or factory-set within the setting range. Subsequent adjustment of the set point on site is made using the adjustment screw, which is covered by the access cover plate with lead seal option.

Repeatability of the set point

≤ 1 % of span

Please specify:

Set point, switching direction for the contact, e.g.:

Set point: 5 bar, rising

After removing the access cover plate, set point adjustment can be made using the adjustment screw.

The set point is selectable within the entire setting range.

For optimal performance we suggest to adjust the set point between 25 ... 75 % of the setting range.

Example

Setting range: 1 ... 2.5 bar with one switch contact

Repeatability: 1 % of 1.5 bar = 0.015 bar

Dead band: 0.3 bar (see table setting ranges)

2 x repeatability + dead band = 2 x 0.015 bar + 0.3 bar = 0.33 bar

Rising pressure: Adjust set point between 1.33 ... 2.5 bar.

Falling pressure: Adjust set point between 1 ... 2.17 bar.

Ignition protection type ¹⁾

- Ex d I Mb (mines)
- Ex d IIC T6/T4 ²⁾ Ga/Gb (gas)
- Ex tb IIIC T85/T135 ²⁾ Da/Db (dust)

1) Ex d IIC T6/T5 Gb and Ex tb IIIC T85/T135 Db (version with measuring element "P")

2) The temperature class is related to the ambient temperature range. See the type examination certificate for further details.

Process connection (A)

Stainless steel 316L

- ¼ NPT female (standard)
- ½ NPT, G ½ A, G ¼ A male via adapter
- ½ NPT, G ¼ female via adapter
- M20 x 1.5 male via adapter

Electrical connection

- Connection cable
- Length: 1.5 m
Wire cross-section: 0.5 mm² (20 AWG)
Insulation material: Silicone

Threaded connection (B)

Material: AISI 316

- ½ NPT male (standard)
 - M20 x 1.5 male (adapter)
 - M20 x 1.5 female (adapter)
 - ½ NPT female (adapter)
 - ¾ NPT female (adapter)
- Terminal box

Dielectric strength

Safety class I (IEC 61298-2: 2008)

Mounting option

- Direct
 - Wall bracket from stainless steel
- Option: Mounting bracket for 2" pipe mounting

Weight

- 0.6 kg (standard)
- 1.1 kg, with terminal box

Measuring element

Measuring element		Wetted parts	Permissible medium temperature (T _M)
M	Welded diaphragm with antagonist spring	Hastelloy® C276	-40 ... +200 °C
G	Piston with antagonist spring and welded diaphragm	Hastelloy® C276	-40 ... +140 °C
P	Piston with antagonist spring	Stainless steel 316L, O-ring FPM ^{1) 2)}	0 ... 200 °C

1) The measuring element is a piston, therefore particularly suited for liquid media.

2) Ignition protection type: Ex d IIC T6/T5 Gb and Ex tb IIIC T85/T135 Db.

Setting range

Measuring range in bar	Measuring element	Setting range depending on the switching direction in bar		Working range in bar	Proof pressure in bar	Max. dead band in bar
		rising	falling			
1 ... 2.5	M	1.3 ... 2.5	1 ... 2.2	0 ... 10	16	0.3
1.6 ... 4	M	2.1 ... 4	1.6 ... 3.5	0 ... 10	16	0.5
2.5 ... 10	M	3.5 ... 10	2.5 ... 9	0 ... 10	16	1.0
6 ... 20	M	7.5 ... 20	6 ... 18.5	0 ... 40	60	1.5
14 ... 40	M	17 ... 40	14 ... 37	0 ... 40	60	3.0
20 ... 100	P, G	35 ... 100	20 ... 85	0 ... 500	750	15
40 ... 160	P, G	65 ... 160	40 ... 135	0 ... 500	750	25
50 ... 400	P, G	85 ... 400	50 ... 365	0 ... 500	750	35
150 ... 700 ³⁾	P	250 ... 700	150 ... 600	0 ... 1,000	1,500	100
200 ... 1,000 ³⁾	P	345 ... 1,000	200 ... 855	0 ... 1,000	1,500	145

3) Repeatability of the set point ≤ 1.6 % of span





Options

- Cleaned for oxygen service
- Drying of wetted parts
- Measuring element piston with O-ring NBR (permissible medium temperature: -10 ... +110 °C)
- NACE compliant to MR 0175, ISO 15156 and MR 0103
- Terminal box, aluminium alloy, copper-free epoxy resin, coated with 3 connections ½ NPT female, ingress protection IP65
- Grounding cable cross-section: max. 4 mm²
- Other cable length: 3 m, 5 m
- Offshore version

Assembly (Option)

- Shut-off valve model 910.11, see data sheet AC 09.02
- Barstock valve model 910.81, see data sheet AC 09.18
- Diaphragm seals, see website

Approvals

Logo	Description	Country
	EU declaration of conformity <ul style="list-style-type: none"> ■ Pressure equipment directive ■ Low voltage directive ■ ATEX directive ¹⁾ <ul style="list-style-type: none"> I M 2 II 1/2 GD II 2 GD (version with measuring element "P") 	European Community
	IECEX ¹⁾ per IEC 60079-0, IEC 60079-1, IEC 60079-26, IEC 60079-31 <ul style="list-style-type: none"> Ex d I Mb Ex d IIC T6/T4 ²⁾ Ga/Gb, Ex ta/tb IIIC T85/T135 ²⁾ Da/Db Ex d IIC T85/T135 ²⁾ Gb, Ex tb IIIC T85/T135 ²⁾ Db (version with measuring element "P") 	IECEX member states
	EAC (option) Hazardous areas (option)	Eurasian Economic Community
	KOSHA (option) Hazardous areas	South Korea

- 1) Double marking ATEX and IECEx on the same product label.
 2) The temperature class is related to the ambient temperature range.


Certificates (option)

- 2.2 test report per EN 10204
- 3.1 inspection certificate per EN 10204

Approvals and certificates, see website

Dimensions in mm


Standard version

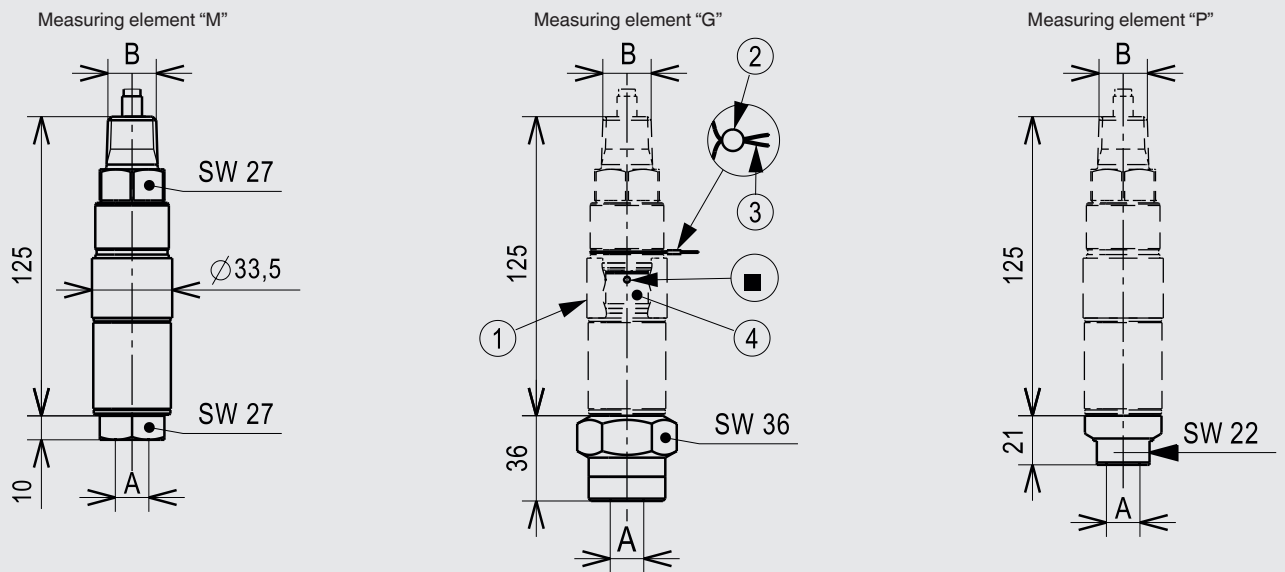


Legend

- | | | |
|---|------------------------|-------------------------|
| ① Access cover plate | ③ Stainless steel wire | A Pressure connection |
| ② Lead seal | ④ Adjustment screw | B Electrical connection |
| ■ Set point adjustment rod \varnothing 3 mm | | |

Option: Terminal box

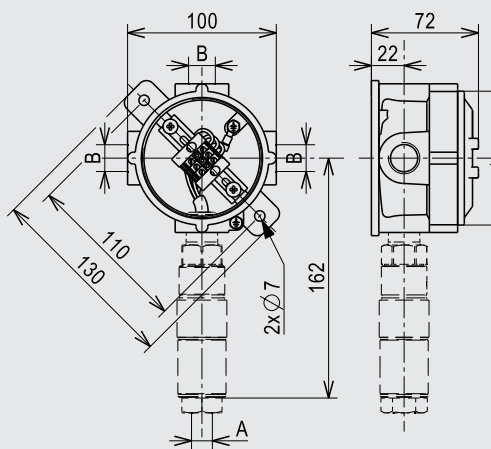

Option: Wall bracket

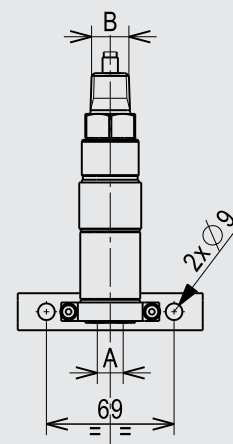

Ordering information

Model / Measuring element / Contact version / Measuring range / Process connection / Electrical connection / Options

© 12/2010 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

