

## Meter run Model FLC-MR

WIKA data sheet FL 10.02

### Applications

- Power generation
- Oil production and refining
- Water treatment and distribution
- Gas processing and transmission
- Chemical and petrochemical industry



### Special features

- Maximum operating temperature up to 800 °C
- Maximum operating pressure up to 400 bar
- Suitable for liquid, gas and steam flow measurement
- Accuracy  $\leq \pm 1.0\%$  of actual flow rate
- Repeatability of measurement 0.1 %

### Meter run, model FLC-MR

### Description

Differential pressure flow meters are used in many industrial applications. If a high measuring accuracy is requested, the best solution for primary elements is a meter run.

A meter run is an assembly consisting of an orifice plate with flanges and calibrated upstream and downstream pipes. Since the meter run is manufactured as one unit, it is possible to optimally match all components with each other. Thus any faults that might lead to measuring inaccuracies can be avoided.

Standards use the term “meter run” only for small pipe diameters up to 1 ½". For larger pipe diameters starting from 2" the model FLC-MR-SP is the appropriate solution.

Irrespective of the size, the type of installation and tapping point or the different transmitter connections, our portfolio offers the optimal solution for each application.

## General specifications

### Nominal size

Available in accordance with all relevant standards

### Nominal pressure rating

Available in accordance with all relevant standards

### Pipe schedule

The pipe schedule must be specified by the customer.

### Materials

See specifications of each model.

### Pressure tapplings

See specifications of each model.


### Sealing faces

- Raised face
- Ring joint (option)

### Orifice plate


For detailed specifications see data sheet FL 10.01

### Mounting options

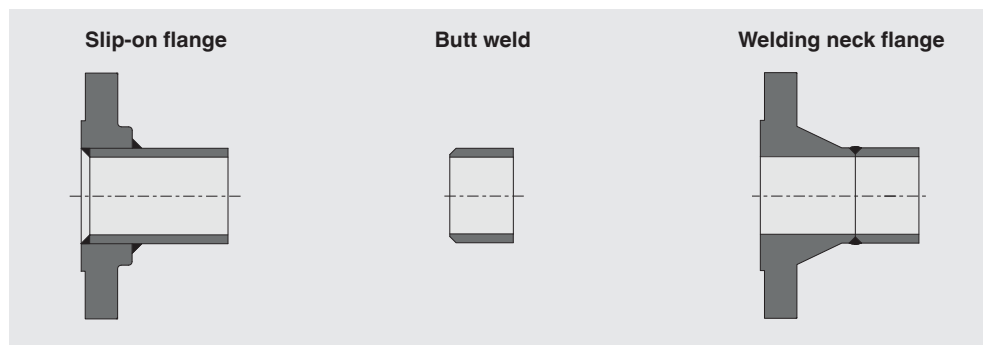

### Length rule

The illustration shows the standards relating to the length of upstream and downstream pipes.

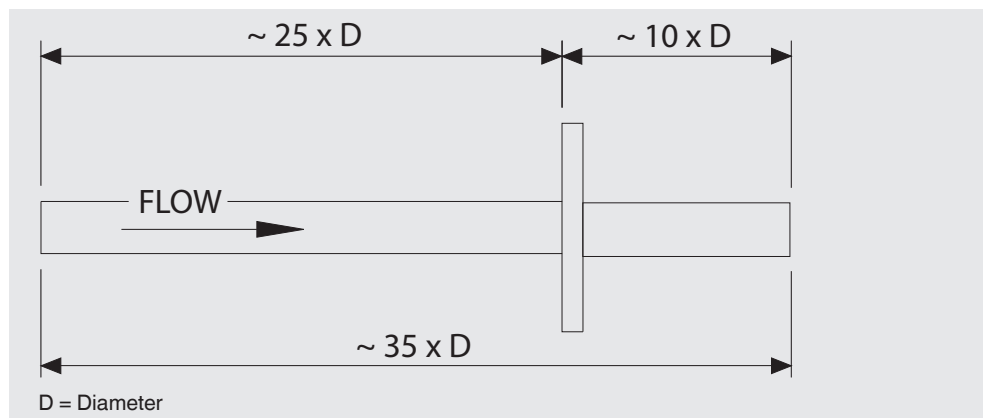

## Specifications, model FLC-MR-IO

### Nominal size


¼ ... 1 ½" (DN 15 ... 40)

### Pressure tappings

- Corner taps
- Two oval flanges for a direct connection of a differential pressure transmitter

### Materials


- Pipe flanges: Stainless steel 316/316L
- Orifice flanges: Stainless steel 316/316L
- Studs: Stainless steel ASTM A 193 Gr. B8
- Nuts: Stainless steel ASTM A 194 Gr. 8
- Plug: Stainless steel 316
- Sealing: PTFE/Graphite
- Orifice plate: Stainless steel 316/316L

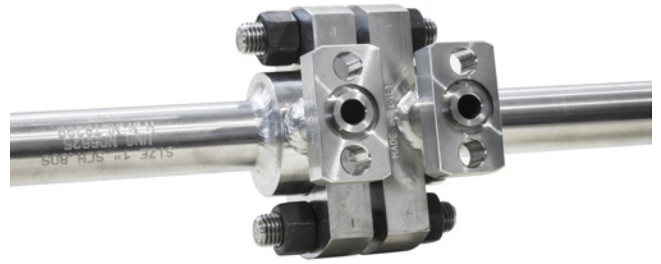

Integral orifice, model FLC-MR-IO

Other solutions on request.

### Dimensions

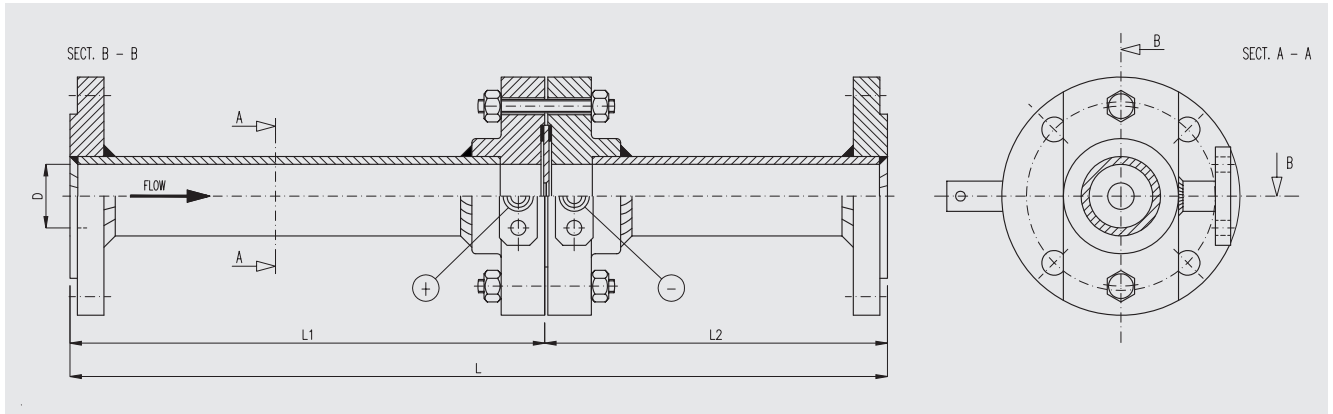

Nominal size	Dimensions in mm	Dimensions in mm			Weight in kg
		L	L1	L2	
½" (DN 15)	550	380	170	5	
¾" (DN 20)	700	500	200	8	
1" (DN 25)	900	650	250	10	
1 ½" (DN 40)	1.300	1.000	300	22	

Dimensions reported in the table are independent from the "Mounting options" selected. The weight indicated is referred to the slip-on solution as also indicated in the drawing.

## Specifications, model FLC-MR-STD

### Nominal size

¼ ... 1 ½"

### Pressure tappings

- Corner taps
- Two ½ NPT connections

### Materials


- Pipe flanges: Stainless steel 316/316L
- Orifice flanges: Stainless steel 316/316L
- Studs: Stainless steel ASTM A 193 Gr. B8
- Nuts: Stainless steel ASTM A 194 Gr. 8
- Plug: Stainless steel 316
- Sealing: PTFE/Graphite
- Orifice plate: Stainless steel 316/316L



Standard meter run, model FLC-MR-STD

Other solutions on request.

### Dimensions

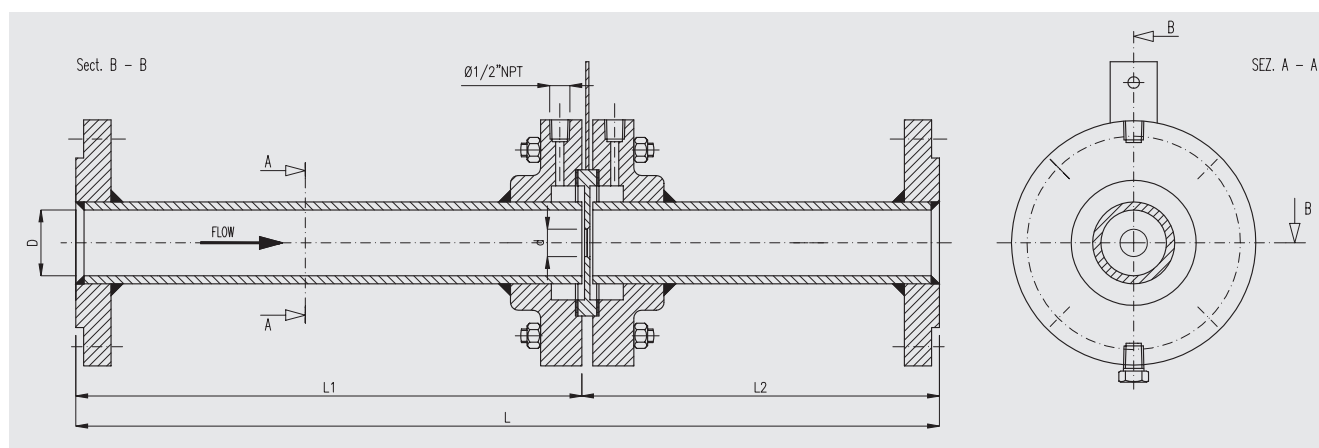

Nominal size	Dimensions in mm			Weight in kg
	L	L1	L2	
½" (DN 15)	550	380	170	6
¾" (DN 20)	700	500	200	9
1" (DN 25)	900	650	250	11
1 ½" (DN 40)	1.300	1.000	300	23

Dimensions reported in the table are independent from the "Mounting options" selected.  
The weight indicated is referred to the slip-on solution as also indicated in the drawing.

## Specifications, model FLC-MR-SP

### Nominal size

≥ 2" (≥ DN 50)

### Pressure tappings

- Flange taps
- Two ½ NPT connections

### Materials


- Pipe flanges: Stainless steel ASTM A106
- Orifice flanges: Stainless steel ASTM A105
- Studs: Stainless steel ASTM A 194 Gr. B7
- Nuts: Stainless steel ASTM A 194 Gr. 2H
- Plug: Carbon steel
- Sealing: Stainless steel 316, graphite, carbon steel
- Orifice plate: Stainless steel 316/316L



Special meter run, model FLC-MR-SP

Other solutions on request.

### Dimensions

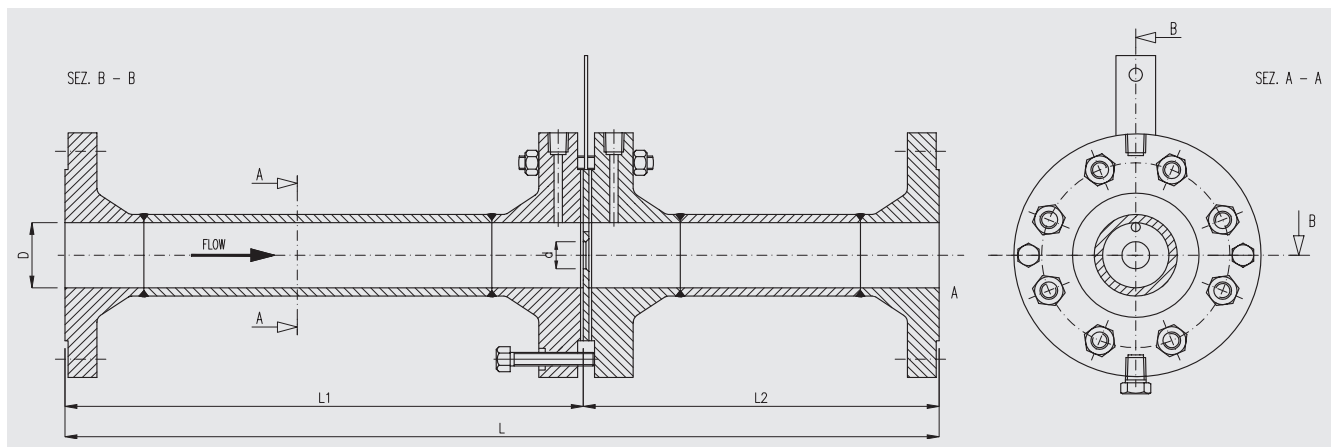

Nominal size	Dimensions in mm	Weight in kg		
		L	L1	L2
2" (DN 50)	1.500	1.200	300	25
2 ½" (DN 65)	1.600	1.250	350	38
3" (DN 80)	1.800	1.400	400	51
4" (DN 100)	2.200	1.700	500	82

Die Abmessungen in der Tabelle sind unabhängig von der gewählten "Einbaumöglichkeiten".  
Das angegebene Gewicht bezieht sich auf die Lösung zum Aufstecken, wie auch auf der Zeichnung angegeben.

### Ordering information

Model / Nominal size / Nominal pressure rating / Pipe schedule / Material / Sealing face

© 2013 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.

