


Glass tube flowmeter

Model : F808

Spec. sheet no. FD08-08

Description

Glass tube rotameters with small dimension are designed to be used where the installation space is limited.

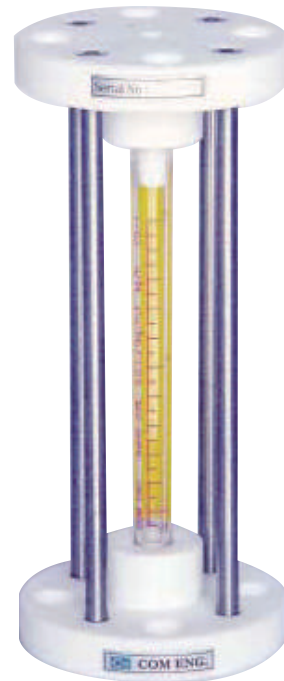

Specification

Process connection

Flanged

Pressure rating

Max.8 kgf/cm²

Size

15A ~ 50A

Temperature rating

Max.120°C

Material

Steel
304SS
316SS

Accuracy

±2.0% of full scale

1. Base model**F808** Glass tube flowmeter**2. Flow direction type****D1** Bottom and top**3. Line size**

JIS	mm	ANSI	inch	DIN	mm
J015	15A	A001	½B	D015	15A
J020	20A	A002	¾B	D020	20A
J025	25A	A003	1B	D025	25A
J040	40A	A004	1½B	D040	40A
J050	50A	A005	2B	D050	50A
XXXX	Other				

4. Flange rating and connection type

J010 JIS 10K
A010 ANSI 150 Lb
P010 PN10
XXXX Other

5. Main material (See material table)

A Body material / Carbon steel
B Body material / 304SS
C Body material / 316SS
O Other

6. Float material

A Acetal
4 304SS
5 316SS
F PTFE
P PVC
O Other

7. Option

10 One point alarm
20 Two point alarm
NO None

1	2	3	4	5	6	7
F808	D1	J015	J010	A	5	NO

Sample ordering code

Flow chart

Float Size	Standard flow rate water (m ³ /h)		Measuring range				Pressure loss (mmH ₂ O)		Pressure rating (kgf/cm ²)	Dimension (mm) L
	304SS	PVC	Water (m ³ /h)		Air (Nm ³ /h)		H ₂ O	Air		
15A	0.1 ~ 1	0.08 ~ 0.8	0.03 ~ 0.3 0.2 ~ 2	0.03 ~ 0.3 0.15 ~ 1.5	0.3 ~ 3 1.2 ~ 12	0.3 ~ 3 2 ~ 20	100	20	8	254
20A	0.15 ~ 1.5	0.12 ~ 1.2	0.03 ~ 0.3 0.2 ~ 2	0.03 ~ 0.3 0.15 ~ 1.5	0.3 ~ 3 2 ~ 20	0.3 ~ 3 3 ~ 30	200	30	8	254
25A	0.35 ~ 3.5	0.25 ~ 2.5	0.15 ~ 1.5 0.5 ~ 5	0.1 ~ 1 0.35 ~ 3.5	1 ~ 10 4 ~ 40	1.5 ~ 15 6 ~ 60	250	40	5	290
32A	0.6 ~ 6	0.45 ~ 4.5	0.3 ~ 3 0.7 ~ 7	0.25 ~ 2.5 0.6 ~ 6	2 ~ 20 7 ~ 70	3 ~ 30 10 ~ 100	300	50	5	290
40A	1 ~ 10	0.8 ~ 8	0.35 ~ 3.5 1.2 ~ 12	0.3 ~ 3 1.0 ~ 10	3 ~ 30 12 ~ 120	4.5 ~ 45 15 ~ 150	350	60	5	300
50A	1.5 ~ 15	1.2 ~ 12	1 ~ 10 2 ~ 20	0.8 ~ 8 1.5 ~ 15	3.5 ~ 35 15 ~ 150	5 ~ 50 2 ~ 200	400	100	4	320

* When the size is larger than 65A, to be consulted with a maker

Material table

Part list	Material code		
	A	B	C
Flange	Carbon steel	304SS	316SS
Float	304SS / 316SS, PVC, Teflon, Acetal		
Taper tube	Pyrex glass		
Guide rod	304SS / 316SS		
Packing	NBR	NBR, Viton, EPDM	
Stay bolt	Carbon steel	304SS	
Nut	Carbon steel	304SS	

* Guide rod can be excluded as per flow rate

Dimension

